



# Waste Water Access Chamber Order/Quote Form

www.gpk-fargo.com

(For Submittal Information and dimensional data visit our website)

Sale Order \_\_\_\_\_ PO#: \_\_\_\_\_ Date: \_\_\_\_\_ Quote#: \_\_\_\_\_  
(To be Assigned by GPK)

Job Name & Location: \_\_\_\_\_

Company: \_\_\_\_\_  
Contact: \_\_\_\_\_  
Address: \_\_\_\_\_


City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_  
Phone: \_\_\_\_\_ Fax: \_\_\_\_\_ Email: \_\_\_\_\_

Signature: \_\_\_\_\_

Base size \_\_\_\_\_ (ASTM D3034 or F679 PS46)

Flat or inverted bottom \_\_\_\_\_

Number of outlets \_\_\_\_\_

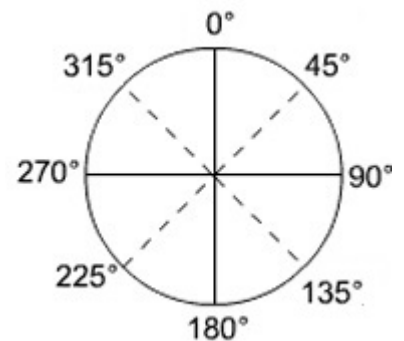

Notes (For GPK use.)


Outlet	Size	Outlet Type	Position Degrees
#1			
#2			
#3			
#4			

## WasteWater Access Chambers

Product Description	Outlet Sizes	Socket Depth (SD)	Dimension (B)
8" Access Chamber	4"-8"	4.37	5.58
10" Access Chamber	4"-10"	5.00	5.75
12" Access Chamber	4"-12"	5.00	6.00
15" Access Chamber	4"-15"	5.25	6.75
18" Access Chamber	4"-18"	7.00	7.00
21" Access Chamber	4"-21"	8.50	7.25
24" Access Chamber	4"-24"	9.00	8.24
30" Access Chamber	4"-30"	16.00	8.50

## Outlet Types

YG	C900 Gasketed	JM	JM Eagle Corrugated
YH	C900 Solvent Weld	PR	Prinsco Corrugated
PG	PSM Gasketed	UR	Ultra Rib
PH	PSM Solvent Weld	UC	Ultra Corr
IG	IPS Gasketed	C2	Corr21
IH	IPS Solvent Weld	P2	Pro21
AD	ADS Corrugated	VY	Vylon
O	Other		

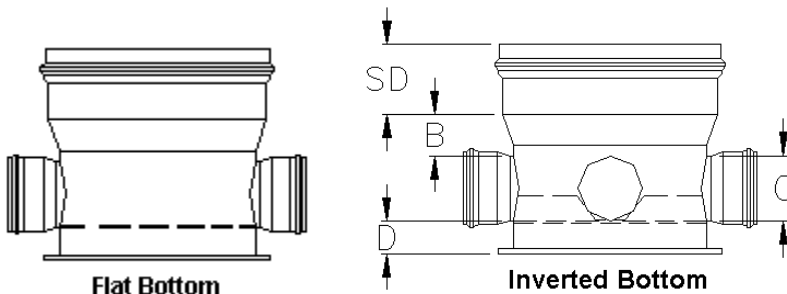

Maximum Invert Depth 2 1/2"  
Dimension (C) = Pipe OD of the outlet.  
Dimension (D) = Standard length of 3".  
Maximum of 2 size on size outlets.

\* Outlets available for Corrugated HDPE, PSM, IPS, C900 and Profile Pipe.

1601 43rd Street North • Fargo, ND 58102  
Phone: 701-277-3225 Toll Free: 800-437-4670  
Fax: 701-277-9286 or 800-822-6989